


UNIT:mm

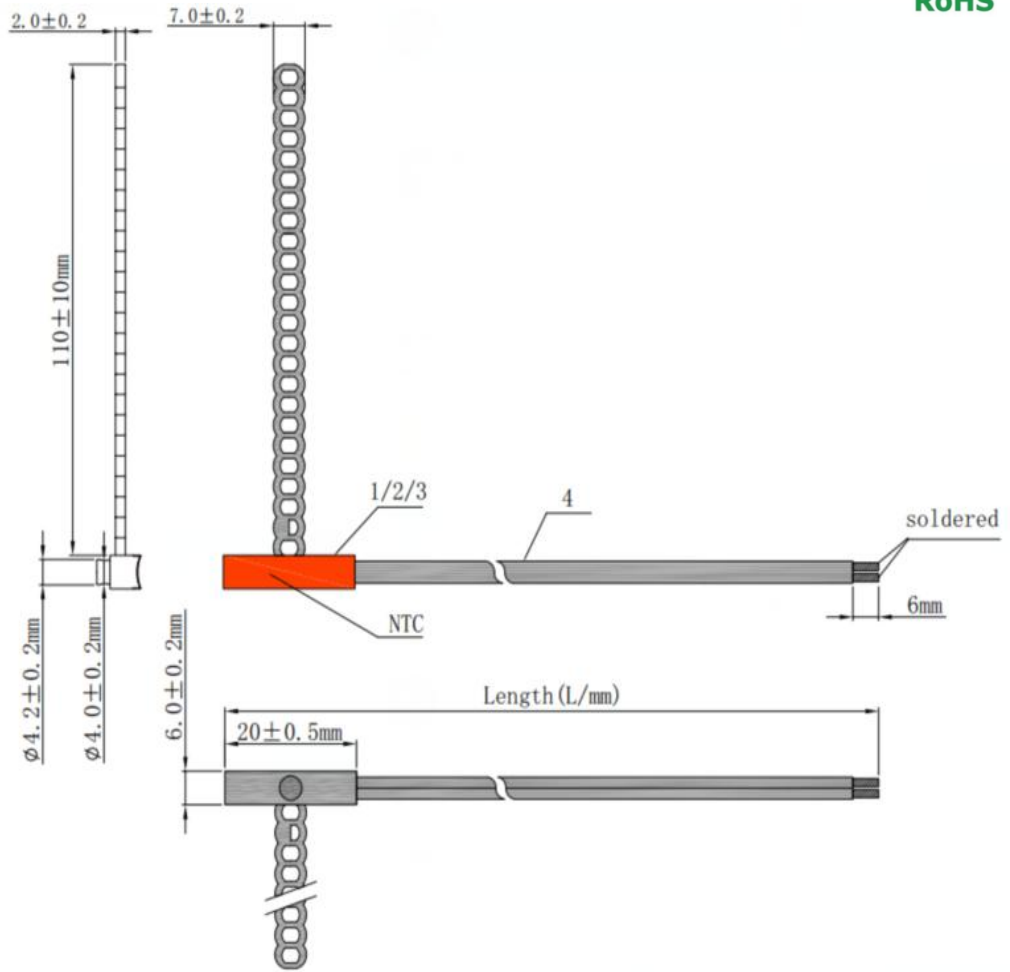

NO.	Component	Material and Specifications	Q'TY	Unit	Comment	
Approved by	1	ELEMENT	R25:10K±1%, B25/85: 3977±1%	1	PCS	
DZ LING	2	Coating	(TPE) Thermoplastic Elastomer		g	Black
	3	Housing	6*20mm Copper plate	1	PCS	
	4	LEAD WIRE	AWG26*2C TPE Flat (B Type)	2000	mm	Black
Date	5	Wire ends	Tinned			
2018.07.25						

Operating temp. range(°C)	Time response (Sec.)	Dissipation factor (Mw/°C)	Withstanding Voltage (Sec.)	Insulation Resistance (MΩ)
-40 ~ +110	About 15	About 2	1500VAC 2Sec.	500VDC, ≥ 100

Customer	
Customer PN	
Part Number:	CWFM0103F3977F-202MC